





HH-B30+T Single Phase Hoist and Trolley

3 Ton Single Speed Hoist and Trolley

1-Phase 115V or 230V



BISON
LIFTING EQUIPMENT

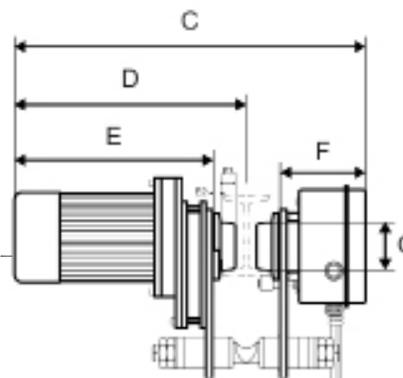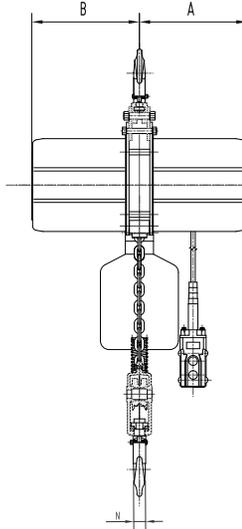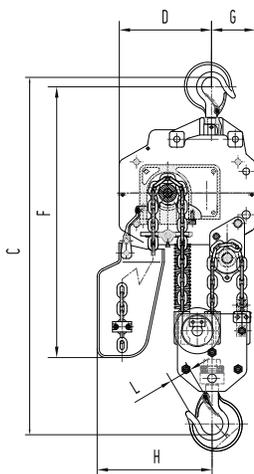

Single Phase Trolley Specification

Product Code:	Cap.	Beam width	Running speed	Power Supply	Control Voltage	Net weight
	tons	inches	ft./min	Volts (1-Phase)	Volts	lbs.
HH-B30-T	3	3.94 - 7.99	33	115/ 230	24	119

Product Code:	Cap.	A	B	C	D	E1	E2	E3	F	G	H	J	K
	tons	inches											
HH-B30-T	3	10.71	15.43	23.46	15.39	12.72	0.59	1.18	5.43	3.78	5.24	5.67	6.04

Single Phase Hoist Specification

Product Code:	Cap.	Head Room (C)	A	B	G	D	L	F	H	N
	Tons	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches	Inches
HH-B30	3	31	10	10	4	8	1.69	38	11	0.9

Product Code:	Cap.	Standard Lift Height	Lifting Speed	Motor Output	Power Supply	Control Voltage	Rated Current (amps)		Load Chain Size	Chain Fall	Pendant Cord Length	Total Net Weight
	Tons	Ft.	Ft. /min	Hp.	Volts (1-Phase)	Volts	@115v	@230v	mm	Lines	Ft.	Lbs.
HH-B30	3	20	7	2	115/ 230	24	14.2	7.1	7.1	3	17	198